
Operating & installation instructions



classic power





service partner (to enter during the commissioning)

By choosing the heat pump classic you have decided to purchase a proven product. The unit considers the knowledge acquired in many years of using heat pumps with state-of-the-art technique.

The heat pumps of the SmartHeat product range distinguish themselves by an optimization according to ecological points of view. The increasing performance as well as the use of coolants which are very harmful to the environment are to important criteria which had been taken into consideration when designing the units.

A high performance equals to a high ratio of regenerative environment (heat) energy, which is used to heat living rooms - and thus complies with a little part of CO₂ -emissions and little electrical power consumption. When operating a heat pump the user thus contributes to the protection of our environment and saves heating cost.

While using non-toxic, non-explosive and non-flammable coolants ozone-depleting chlorinated hydrocarbons are being replaced.

Please thoroughly read the present operating instructions and make sure to observe the safetyrelevant notes.

Content

I	Ger	neral notes	3
	1.1	Limitation of liability	3
	1.2	Duty of care of the operator	3
	1.3	Basic instructions	4
2	Pur	pose	4
	2.1	Proper use	4
3	Pro	oduct description	5
	3.1	Functional description / Application range	5
	3.2	Option i - Inverter technology	7
	3.3	Option R - Active cooling	7
4	Dev	vice view	8
5	Tra	nsportation	10
6	Inst	tallation	10
	6.1	General notes	10
	6.2	Minimum clearances for the installation	10
7	Asse	embly	11
	7.1	General notes	11
	7.2	Preparation	
	7.4	Connection of the heating system	12
	7.5	Electrical connection	13
8	Cor	mmissioning	15
	8.1	General notes	15
	8.2	Preparation	15
	8.3	Notes for the proper aeration and de-aeration	15
	8.4	Control	17
9	Mai	intenance, cleaning and care instructions	17
	9.1	Maintenance	17
	9.2	Cleaning of the heating system	17
	9.3	Care	18
10) Fail	lure	18
П	Dry	y heating	18
12	. Dec	commissioning	19
13	В Нус	draulic examples	19
	13.1	Basic notes	19
	13.2	Hydraulic schematics	19
11	l Ann	oondix	23

I General notes

I.I Limitation of liability

All technical information data and notes for installation and operation included in these instructions are state-of-the-art at the time of printing and are performed considering our present experiences and knowledge in all conscience. It is not possible to derive any claims from the information, illustrations and descriptions of these instructions.

The manufacturer does **not assume any liability** for damages due to:

- Improper use
- Use of not admitted spare parts
- Unauthorized retrofitting of any kind
- Technical changes
- Improper changes of the coolant quantity
- Non-observance of the operating and installation instructions
- Damages resulting of the non-observance of applicable standards

1.2 Duty of care of the operator

In the design and completion of heat pumps all corresponding EC directives, DIN and VDE standards and regulations are complied with (refer to EC declaration of conformity).

The relevant VDE-, EN- and IEC- standards must be complied with for electrical connection of heat pumps. The local connecting conditions of the utilities must be observed.

The operator must in particular make sure that

- The technically conditioned minimum and maximum values does not fall short or are exceeded.
- The machine is only operated in proper, functional status and that in particular it is regularly checked if the safety installations are working properly.
- Only sufficiently qualified and authorized staff who knows the operating instructions and in particular the included safety instructions is allowed to install maintain and repair the machine.
- All safety and warning instructions applied on and in the machine must not be removed and must be maintained legible.

These operating instructions must be stored in the range of the controller. It must be guaranteed that all persons who have to perform activities on the machine can read the operating instructions at any time.



If it is necessary to switch off the complete system during the heating period, there is a risk that the system freezes. In order to avoid damages caused by frost, empty the water circuit of the system after complete switching off or decommissioning of the system.

1.3 **Basic instructions**



The heat pump must only be operated with all connected media.



A flow monitoring in the heating system must be guaranteed by the installation's operator.



Before opening the unit it must be made sure that the heat pump is zero potential.



Only a specialist is allowed to set the control to manual operation for a short term since in this way all control and safety functions are inoperative.



The unit must be installed on a sustainable, flat and horizontal ground.



The transportation of the heat pump must be performed with care. It is only allowed to tilt the machine cabinet to more than 45° for a short term.



Only operate the heat pump within the usage frequency (refer to the data sheet) (in Germany 50Hz).



In emergency situations decommission the heat pump resp. switch in currentless condition (main and control voltage).



Only expert approved specialists are allowed to work on the cooling circuit.



An external separator must be provided for all electrical supplies of the machine (e.g. main switch).



The refrigerant circuit of the heat pump must be controlled by certified staff, according to the regulation EC No 842/2006, at least every twelve months in order to check if the system is tight.

Purpose

2.1 Proper use

The heat pumps can be used in existing or newly constructed heating systems. The heat pump is only designed to heat up heating water and service water. The existing operating and installation instructions are binding for the following heat pumps:

> classic power serie: **BWi** WWi

Please find the technical data of your heat pump in the annex.

	Туре	Operating limit	ΔΤ
Heating circuit	BWi / WWi	25 55°C	5-7K
Heat source	₩₩i	5 15°C	3-5K
Heat source	BWi	-10 15°C	3-5K

3 Product description

3.1 Functional description / Application range

Brine-water heat pump: SmartHeat classic power BW

The SmartHeat classic power BW heat pump is working with a heat exchanger as evaporator and a heat exchanger as condenser connected to a brine circuit and thus heats up water for heating purposes as well as drinking water. The ground collector of the BW system consists of brine water conveying PE pipes which are horizontally installed in a frost-free area. Optionally (e.g. in case of shortage of space) deep probes may be used. In both cases the brine water is conveyed as heat carrier medium through the enclosed circuit (brine circuit) by means of the pump. The required brine recirculation pump as well as the expansion tank can be installed in the building or in an outside shaft.



Provide for sufficient aeration of the heat source circuit!

Water-water heat pump: SmartHeat classic power WW

The design of the SmartHeat classic power WW heat pump is very similar to the design of the BW heat pump. However, instead of the brine circuit an extraction well and an injection well are connected which convey ground water to the heat pump. The WW heat pump is adapted to the higher temperature level of ground water compared to a brine circuit. Also the necessary precautions had been taken in order to allow a trouble-free operation also under the special requirements of ground water (corrosion due to contents and free oxygen as well as accumulation of mud in the heat exchanger).

The SmartHeat classic power WW heat pump also heats up water for heating purposes in a heat exchanger for heating purposes and hot water preparation designed as a condenser. The integration of a decoupling storage in the hot water circuit reduces the frequency of operation of the heat pump.



Provide for sufficient aeration of the heat source circuit!

Guidance value for the water quality

The ground water which is used as heat source must fulfil the following listed minimum requirements:

	Soldered copper	Alfa Nova	
Conductivity in μ -Siemens / cm *	< 450	< 700	+
pH - value	< 6	< 6	-
	6 - 7	6 – 7	0
	7 - 9	7 – 9	+
	> 9	> 9	-
Total hardness in °dH	< 15	< 15	+
	> 15	> 15	o
Chloride in ppm	< 50	< 100	+
Sulphate in ppm	< 50	< 50	+
	50 – 100	50 – 100	o
	> 100	> 100	-
Carbon dioxide in ppm	< 5	< 5	+
	5 – 10	5 – 10	o
	> 10	> 10	-
Ratio [HCO ₃ -] / [SO ₄ ²⁻]	>	> I	+
Nitrate in ppm	< 100	< 100	+
Oxygen in ppm	< I	< I	+
	I – 8	I - 8	0
	> 8	> 8	-
Ammonia in ppm	< 2	< 2	+
	2 – 10	2 – 10	o
	> 10	> 10	-
Solute iron in ppm	< 0,2	< 0,2	+
	0,2 - 0,5	0,2 - 0,5	o
	> 0,5	> 0,5	-
Solute manganese in ppm	< 0,05	< 0,05	+
	0,05 - 0,1	0,05 – 0,1	o
	< 0,1	< 0,1	-
Hydrogen sulfide in ppm	< 0,05	< 0,05	+
free chlorine in ppm	< 0,5	< 0,5	+
Solids (suspended) mg/l; Imperatively avoid fibre substances	> 10 < 10	> 10 < 10	- 0

*at 20°C

Furthermore, we recommend the installation of a flow meter in the well water circuit by the customer in order to protect the heat pump against non-continuous volume flows and thus against possible damages.

^{+ →} The used materials are normally of good resistance.

^{• →} If several factors are evaluated with o, corrosion can appear.

[→] It is advised against using a water heat pump.

3.2 Option i - Inverter technology

The advanced inverter technology will fit to the compressor speed stepless exact to each request heating or cooling demand. An especially power-saving and efficient work with high annual work figures is guaranteed in comparison to fixed speed compressors by this exact, intelligent and soft regulation.

3.3 Option R - Active cooling

General notes

The classic module active cooling allows you to operate your heat pump heating unit also with a cooling function in addition to the known hot and warm water preparation functions. These cooling function enables the cooling of the building in relation with an appropriate distribution system when it is operated in summer.

Since the module active cooling is based on the use of a cooling circuit of the heat pump there is a possibility of cooling also at increased outside and earth temperatures.

Operation

The heat pump module active cooling is based on the reversibly designed refrigerating circuit which is integrated in the heat pump basic unit, i.e. the heat pump is working in reverse operation. In this way it is possible to cool the heating water in summer by means of a heat pump. The living rooms are cooled down and the ground is heated up.

Since the module active cooling is based on the use of the heat pump compressor the accruing power consumption is comparable to the power consumption during the heating period.

Proper use

The classic module active cooling is an optional module for the upgrading of your heat pump device during production at the factory. The indications for the following heat pumps are binding:

classic power serie: BW



The classic module active cooling represents a firmly combined unit together with the classic heat pump.



The manufacturer cannot be held liable for damages and malfunctions which can be traced back to non-observance of the operating and installation instructions.

Planning and dimensioning

For planning and dimensioning of heating and cooling spaces consider the common technical rules.

For maximum transferable cooling capacity it can be calculated with 100 W/m^2 for wall and sealing spaces. For underfloor spaces, which are used for cooling, lower transferring capacities should be considered – at maximum $20 \dots 25 \text{ W/m}^2$. The surface of the floor is only suitable in lower rate for cooling a building.

Remark: During cooling operation the relative humidity of the air is raising. This may lead to undershooting the dew point temperature and therefore condensing of water at the cooled spaces. If the condensing takes place at the surface or inside of the walls, there is the danger of damages by mildew.



Please consider that the room temperatur should not be lower than 6 K below outside air temperature with respect to health!

Electrical connection

The module active cooling reveives the required electric power with the power supply of the heat pump. An additional power supply is not required.

Hydraulic connection

For hydraulic connection there are no differences to heat pumps without the module active cooling. The outgoing and backflow maintain their flow direction and are changing to cooling outflow and cooling backflow. Additional hydraulic connections for cooling function are not available.



During start-up of the heat pump with module "Active Cooling" take care of good flow in heating circuit! Have a look at the data sheet of the heat pump! If this flow is not ensured, there is the possibility of freezing of the heat exchanger, if the heat pump operates in cooling mode during start-up unintentionally. This may lead to damages at the heat exchanger! A flow monitoring in the heating system must be guaranteed by the installation's operator.



During start-up with cold heating water this may be possible also at sufficient volume flow! The water of heating circuit should not be colder than 25°C at the first start-up!

4 Device view

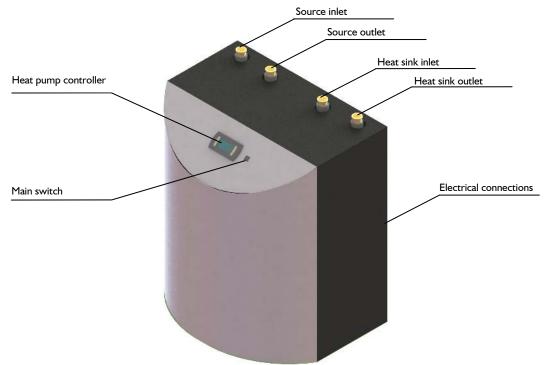


Fig. : Front view - perspective

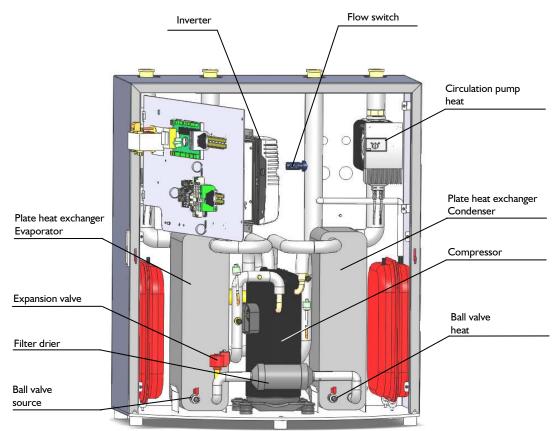


Fig. : Front view open - perspective

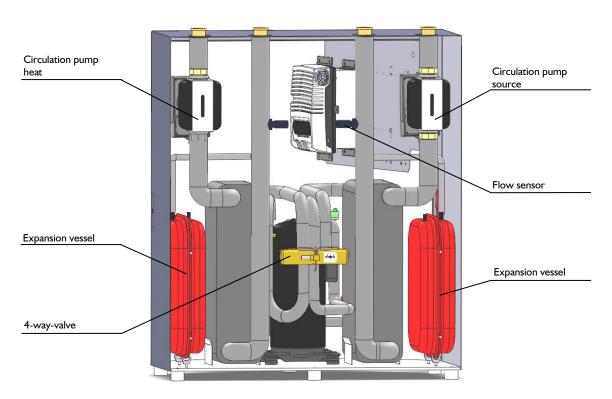


Fig. : Rear view open - perspective

5 Transportation

Before delivery our products are checked if they are without damages and functional and finally they are packed.



The transportation of the heat pump must be performed with care. It is only allowed to tilt the machine cabinet to more than 45° for a short term in order to insert it.

In order that the cooling circuit and the function of compressors are not impaired it is necessary to transport the heat pump vertically.

Imperatively avoid serious impacts. The sensitive spring-supported bearing of the compressors might get damaged.

Observe the weight of the heat pump and use appropriately dimensioned transportation means. It is recommended to use a lift truck or a similar device in order to transport the unit to the installation place.

6 Installation

6. I General notes

Install the heat pump in a way that the field service can easily perform commissioning and maintenance works and ensure free working space on all sides (refer to the recommended minimum clearances).

The installation space must be dry and frost-free and have a plane and horizontal ground. The ground must be dimensioned according to the weight of the SmartHeat classic heat pump. The connection to the heating and heat source system should be as short as possible.



When installing the heat pump among others the requirements of the corresponding accident prevention and the regulations of safety and health at work.



Environmental temperature max. 40°C



Environmental temperature min. 5°C




Environmental humidity max. 80 % (not condensed)



Ensure a dry, frost-free installation space and make sure that the floor structure escapable of bearing the unit!

6.2 Minimum clearances for the installation



Observe the distance to other neighbouring units (expansion tanks, storages, etc.)!

7 Assembly

7. I General notes

The following connections must be made at the heat pump:

- Input/output heat source
- Flow/return heating
- Power supply

7.2 Preparation

The connections for the heat pumps of the classic series are at the rear of the device. Comprehensive hydraulic accessories such as e.g. connection kits, switching units, etc. (refer to price list) are available for the optimum connection in the SmartHeat system accessories.

The heat pumps are integrated in the heating network and for drinking water preparation it may be quite different depending on the application. In any case it must be observed that it is necessary to work with spreading between the flow and return from 3-4 K resp. 5-7 K on the heat source and heating side in order to attain the values indicated on the data sheets resp. in order to avoid malfunctions. Compared to traditional incinerators of higher mass flows, i.e. larger pipe cross sections and corresponding pump designs.

Connect input/output heat source at the heat pump according to the designation.



Do not forget the safety devices and the expansion vessel when installing the heat source!



A dirt trap should be mounted at the heat source input of the heat pump in order to protect the evaporator against soiling. Additionally it is necessary to install a micro air bubble separator in the heat source system.



The ground water which is used as heat source must comply with the minimum requirements mentioned under item 3.

7.3 Connection at the side of the heat source

SmartHeat classic BW

Connect input/output heat source at the heat pump according to the designation.



Do not forget the safety devices and the expansion vessel when installing the heat source!



A dirt trap should be mounted at the heat source input of the heat pump in order to protect the evaporator against soiling. Additionally it is necessary to install a micro air bubble separator in the heat source system.



Produce the brine before filling the system.

The brine concentration should have a frost protection of at least -15°C.

Only use anti-freeze on the basis of monoethylene glycol or propylene glycol basis.

SmartHeat classic WW

Connect input/output heat source at the heat pump according to the designation.



Do not forget the safety devices and the expansion vessel when installing the heat source!



A dirt trap should be mounted at the heat source input of the heat pump in order to protect the evaporator against soiling. Additionally it is necessary to install a micro air bubble separator in the heat source system.



The ground water which is used as heat source must comply with the minimum requirements mentioned under item 3.

7.4 Connection of the heating system

Before connecting the heat pump to the heating system it is necessary to rinse the heating system in order to remove possible soiling, remainders of sealing material or other materials. Accumulation of remainders in the condenser can result in a complete failure of the heat pump. After having performed the installation of the heating system, fill, bleed and squeeze off the heating system.

For the optimum connection comprehensive hydraulic accessories are available from the SmartHeat system, such as e.g. connection kits, switching units, etc. If inappropriate connection material is used for the hydraulic installation strong noise development, malfunctions or material damages might occur! The integration of the heat pump into the heating network and for drinking water preparation may be very different depending on the respective application. The hydraulic connection scheme detailed in the annex shown a corresponding option.



Do not forget the safety devices and the expansion vessel when installing the heating system!



Before commissioning the heat pump, it is necessary to guarantee frost-protection. It is necessary to make sure that the hydraulic system does not freeze when the heat pump is switched off or fails.



The minimum heating water throughput of the heating pump must be made sure in any operating status of the heating system.

7.5 Electrical connection

General notes

Work on the opened heat pump cabinet and connection box must only be carried out in dead switched status and by an approved electrician or services technician. All components, necessary for the power supply and control, are in the upper half of the heat pump cabinet.

The necessary cross section of the cable depends on the power consumption of the heat pump. Observe the technical connection conditions of the corresponding energy utilities as well as the VDE 0100.



Make sure to apply a right rotating field when connecting the supply lines for the main current (possibly special tariff). In case of a wrong rotating field the heat pump does not have any output and is getting damaged.



The compressor is protected against thermal overload. The fusing and the motor protective switch for the heat pump as well as the separator from the network must be produced by the system builder.



In case of an extension of the sensor connection line, it is necessary to use a line cross section of at least 0.75 mm².



Do not install the sensor cable together with the current-carrying conductions!

After installation and before commissioning of the system, it is necessary to check and document the earth conductor resistance and the isolation resistance according to DIN VDE 0701 and DIN VDE 0702. These tests must be repeated according to the intervals applicable on site or according to the DIN VDE regulations of the series DIN VDE 0701 and 0702 (commissioning, re-commissioning, etc.).



The terminal assignment diagram of the corresponding heat pump type applies. It is available in the machine and at the appendix of this manual.


Responsibilities for the electrical cabling


For electrical installation of different connection, different responsibilities are applicable. Please observe the following legal regulations:


- The local power supply company is responsible for the connection to a house connection (electricity meter).
- An electrical company approved by the power supply company is responsible fort he installation and connection of the supply line between the electricity meter, fuses, main switch, motor protective switch and terminal box.
- Heating engineers authorizes by SmartHeat or correspondingly qualified electricians may perform the electrical connection of the heat pump. Further special knowledge which the installer gathers during training at SmartHeat is required for such works.
- It must be possible to completely separate the heat pump from the network and control tension via one or, if applicable, several separate external main switches which are upstream to the terminal box. The installer/operator is responsible for installing and connecting the external separator (main switch).

Electrical connections

The design of the electrical supplies and electrical main components are performed by the electrical specialized contractor depending on the local conditions. The following electrical supplies must be available at the installation site of the heat pump:

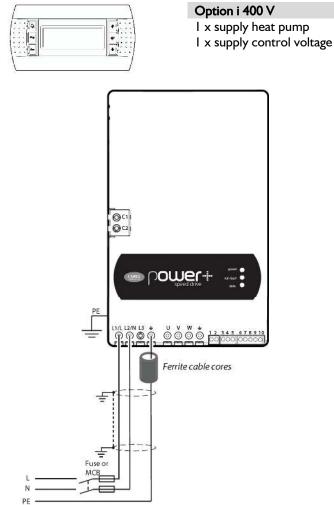



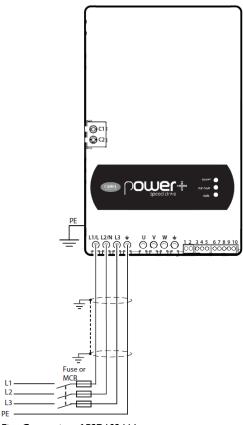

 $3/N/PE \sim 50Hz / 400V$ $1/N/PE \sim 50Hz / 230V$

Fig.: Connecting of PSD10244 Inverter

To ensure conformity to the EMC directive, use shielded cable with tape +braid shields (SN/ST). The cable can also be laid in steel and copper cableways. Earth the shield with 360° a metal clamp on both ends of the cable, as close as possible to the terminals. In case of connection of the shield to the drive earth terminal (not recommended), the shield has to be twisted. The twisted part must be left as short as possible, and the length must not exceed five times the width.

For PSD10122** and PSD10162** it is recommended to use a ferrite cable core (e.g. Fair-Rite 2646665702) rounding earth wire only, located just in front of the drive earth terminal .

Flow monitor source:

The flow of the source circuit can be monitored and used for switching off the heat pump. With water/water and air/water heat pumps, a flow switch must be used. Non-compliance can lead to serious damage in the source area. In such a case, no liability claims against SmartHeat may be invoked.

- The outputs are capable of bearing maximum 1.0 A.
- Summarized the outputs must be charged at maximum 4.0 A.
- For higher connected loads uncoupling relays must be provided.
- When a residual current device (RCD) is installed upstream, this must be carried out as universal current sensitive according to DIN-VDE 0100-530 and has to be of the type B or B+.

8 Commissioning

8. I General notes

In order to guarantee a proper commissioning, it should be performed by a service partner who is authorized by the manufacturer. Under certain conditions it is related to a prolongation of the guarantee (cf. guarantees).

8.2 Preparation

Make sure that:

- all necessary connections of the heat pump required for heating water and service water as well as for the heat source had been performed.
- the device, the heat source system as well as the heating system are properly rinsed, filled and aerated.
- all shut-off valves in the heating and heat source circuit are opened.
- the settings of the heat pump controller are adapted to the heating system according to the operating instructions
- the connection and the fusing of the electrical supply lines is performed
- all screw connections are tight
- the mains switch is set to "ON" resp. "I".

8.3 Notes for the proper aeration and de-aeration

It is commonly found that the heat pump heating systems do not work properly since the heating circuit does not have the necessary volume flow. This is resulting in a triggering of the safety-related equipment of the heat pump.

In case of insufficient or no flow in the heat exchanger of the heating circuit this will lead to a failure of high pressure. It cannot be excluded that in case of insufficient hot water flow also the safety temperature limiter will switch off the system. The enumerated failures are caused in the peripheral and in very rare cases in the heat pump itself. Wrong settings on the controller may have similar effects. The triggering of corresponding sensors and the signalling of a malfunction serve to protect the system and are generally not a sign for a defective heat pump.

Rinsing, de-aerating and filling

It is generally recommended to install a filling and rinsing fitting in the heating circuit, consisting of a shut-off device and two tank filling and draining valves. Before filling the hot water circuit it is necessary to fill the drinking water bag. The heating water is filled in a tank as openly as possible, from where it is pumped in the system in flow direction via the corresponding tank filling and draining valve by means of a powerful pump (e.g. CHI). The shut-off device between the two tank filling and draining valves remains closed. The water escapes from the second tank filling and draining valve after having flown through the system and must be re-conveyed into the open tank via a hose so that it is possible to control the escaping air. The process must be performed, interrupted and repeated via a longer term. (When using fresh water from the line it is particularly important to make interruptions.)

Close the tank filling and draining valve (output) and open the ball valve in order to pump the corresponding recipient into the MAG and to set the system pressure as soon as no more air is escaping from the heat circuit. As soon as this is done, the process can be considered as completed and the system will work successfully after de-aerating the system once again, in particular also the reservoir.

The rinsing process should be performed and logged according to VDI 2035.

Water analysis and water treatment

Planners and installers must check on the system if the available feed water is appropriate to fill the heating system with regard to the total hardness according to VDI 2035 sheet 1. The result of this test must be transmitted in writing to the builder / operator. The decisive factors are the heating performance and the specific system volume:

Total heat output	Total hardness	Total hardness	Total hardness
In KW	In °dH at <20I/kW least boiler screen surface	In °dH at >20I/kW<50I/kW least boiler screen surface	In °dH >50I/kW least boiler screen surface
<50kW	No requirements or < 16.8°dH	II.2°dH	0.11°dH
>50kW<200kW	II.2°dH	8.4°dH	0.11°dH

Regarding this treatment the VDI 2035 gives three options:

- Softening / demineralisation
- Hardness stabilisation
- Hardness precipitation

At this, the *softening* represents the preferred procedure to avoid stone formation, at which the alkaline earths (magnesium and calcium ions) are permanently removed from the system. However, hereby sodium hydrogen carbonate (NaHCO $_3$) is formed in the system, which converts to alkalinized sodium carbonate (Na $_2$ CO $_3$) by heating up the heating water. Since the generated CO $_2$ escapes from the system at the same time, the pH value demanded in the VDI 2035 sheet 2 between 8.2 and 9.5 (when using aluminium maximum 8.5) may considerably be exceeded. However, if the ph value is exceeded, there is a risk of corrosion damages, so that it is necessary to counteract such damages in a second step.

In the hardness stabilisation additives are added to the heating water by which the lime deposits in the system are influenced in a way that formation of stone is being avoided. Contrary to the softening the stone formers are not removed from the system. Regarding the selection, dosing, monitoring and disposal of the additives and of the conditioned heating water it is necessary to take additional measures. It is necessary to make sure that the additives themselves as well as combined with other products which need to be used do not cause any corrosion damages. Furthermore, no products containing phosphates should be used for hardness stabilisation since they precipitate as calcium phosphate mud together with lime.

In the frame of the *hardness precipitation* substances are added to the heating water, which let the dissolved alkaline earths precipitate as mud. This mud must be removed from the heating system by system technical and operational measures (desludging).

8.4 Control

The heat pump is mainly commissioned and operated by means of the heat pump controller; this controller should be located inside the building. The precondition for successful operation of the heat pump is that it is continuously switched on. The controller settings should be adapted to the heating system when commissioning.

Other changes of the settings are often not required, provided that the frame conditions remain unchanged. In case of changes of the frame conditions the parameters must be set in coordination with or by the customer service.

The basic functions of the control as well as the general operation are described in the controller instructions (refer to part 2 of the operating instructions). Furthermore, you obtain information regarding the setting of the required room and hot water temperatures, the setting of your own daily programs for the heating operation and hot water preparation as well as the procedure in case of malfunctions of the system.



The first commissioning should be performed by a service partner authorized by the manufacturer for warranty reasons. When first commissioning the system the pre-settings are programmed and an adaptation to the existing heating system is required.



The operator or any other persons must not perform any changes of the settings on the control (internal heat pump).



The manual operation must only be used by the specialist for maintenance and service. This manual operation de-commissions all control and safety functions.



Please request any further information as well as a commissioning log at the service hotline: +49 3843 / 2279-111.

9 Maintenance, cleaning and care instructions

9.1 Maintenance

According to the EC-VO 842/2006 (F gas regulation) it is necessary to submit all coolant circuits of a coolant quantity >3kg (6 kg for hermetic systems) to a leak test every year. The coolant can be taken out of the machine via the type plate. The leak test must be performed by certified staff according to (EC) No 1516/2007. Document the leak test and keep the log of the machine and the log of the leak test for at least five years. Perform the maintenance of the refrigerant components according to VDMA 24186-3

9.2 Cleaning of the heating system

Oxygen can form oxidation products (rust) in the heating water circuit in particular when using steel components. They attain the heating system via valves, re-circulation pumps or plastic tubes. Therefore, it is particularly necessary to make sure that the installation is diffusion tight in particular for tubes of the floor heating system.

Also remainders of lubricants and sealants may contaminate the heating water. If the water is heavily soiled so that the performance of the condenser in the heating pump is reduced, it is necessary to have the system cleaned by an installer. At this the condenser should be flushed contrary to the direction of flow.

In order to avoid that soiled heating water attains the heating system circuit we recommend you to directly connect the flushing device to the flow and return of the condenser of the heat pump. In order to avoid failures due to dirt deposits it is necessary to make sure that the heat exchanger in the heating system cannot be soiled by installing a dirt trap.

9.3 Care

The external parts of the heat pump can be treated with a damped cloth and commercially available cleaning agents. Generally avoid depositing or cleaning any objects on the heat pump in order to protect the lacquer.



Do not use any cleaning agents containing soda, acids, sand or chlorine in order to protect the surface.

10 Failure

The heat pump classic is a quality product and should work trouble-free. Before delivery our products are tested in order to make sure that they are delivered without damages and functional. However if a failure occurs it is displayed on the heat pump controller.

Any possible errors and their corresponding remedies are listed in the instructions of the controller (refer to part 2 of the operating instructions). If it is not possible to remove a failure by oneself inform an approved installer or service technician.



Additional information is available upon request at the service hotline: +49 3843 / 2279-111

II Dry heating

Heat pump heating systems partially have a basically other behaviour them conventional incinerators since they are pretty well designed for the nominal heat requirement and dispose of a minimum surplus power in order to help you save money. Our experiences have shown that exactly for this reason some building owners have doubts about the performance of the heat pump in their new detached house when moving in. When moving in a new massive built home in the cold season it often reveals that the heat pump heating cannot perform both requirements: drying out a solid construction and covering the transmission and ventilation heat requirement.

In a solid built house there are huge quantities of water (walls, plaster, screed, etc.). In former times at least one year past from the start of construction until moving in the house naturally dried out in winter. Nowadays everything must happen within only a few weeks – but not only with the help of the heat pump.

Please note: In order to evaporate 1000 I of water at a temperature of 20 °C about 680 kWh energy are required!

When using a gas heater for instance a 17-20 kW device is used for a nominal heat requirement of 10 kW in order to guarantee the required hot water preparation. Of course there are sufficient reserves for the dry heating phase. Expect to spend more money in electricity costs during the first heating period due to the dry heating phase. In pre-fabricated houses where there are no solid walls the dry heating phase is limited to the floor screed and therefore this period is considerably shorter.

12 Decommissioning

Provisional decommissioning:



By actuating the power switch and turning it to the position "OFF" the system is decommissioned. Due to the risk of freezing it is only allowed to decommission the system without emptying the heating circuit at temperatures of more than 0°C.

Final decommissioning / disposal:



Before removing the heat pump, disconnect the machine from the power supply and shift it off.



A final decommissioning / disposal is only allowed if it is performed by an expert company.



The heat pump contains electrical and electronic components. In case of improper disposal they might have adverse effects on the environment. Herewith the manufacturer specially points out that the device must not be disposed of as domestic waste but it is necessary to dispose of it as hazardous waste.



Environmentally relevant requirements with regard to recycling, reuse and disposal of fuels and components according to the common standards must be complied with. At this it is particularly important to ensure a professional disposal of the coolant and refrigeration oil.

13 Hydraulic examples

13.1 Basic notes


- To avoid the transmission of sound to the heating circuit, use flexible tubes for connection!
- Freezing protection of the heat pump and the connection tubes should be ensured by the installer and user!
- A minimum outgoing and backflow temperature of 25°C has to be ensured!

13.2 Hydraulic schematics

The following hydraulic schematics do not substitute professional planning. Observe valid rules and legal regulations!

All hydraulics and schemata are remarks.

Hydraulic system example classic

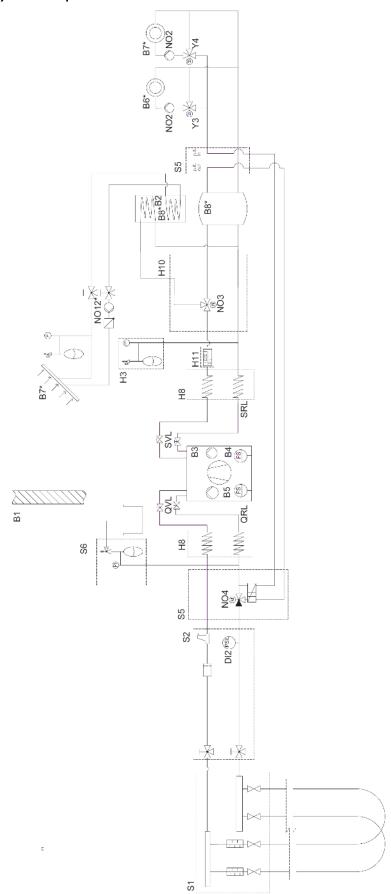

* - Konfiguration Regler aufgrund von Doppelfunktionen beachten!
pay attention to configuration of controller due to double features!
*** - Ausgang NO8 in der Maske DQY aur"Ladepumpe" konfigurieren und in DQB auf "Pumpe" stellen configure output NO8 in mask DQY to "load pump" and in DQB to "pump"

Bezeichnung Description	Funktion Function	
S 1.1	Soleverteiler 3 Abgänge	Brine circuit mainfold 3 outlet
S 1.2	Soleverteiler 4 Abgänge	Brine circuit mainfold 4 outlet
S 1.3	Soleverteiler 5 Abgänge	Brine circuit mainfold 5 outlet
S 1.4	Soleverteiler 6 Abgänge	Brine circuit mainfold 6 outlet
S 2	Quelle Sicherheits-Set (für BW)	Source safety set (for BW)
S 3	Quelle Sicherheits-Set (für WW)	Source safety set (for WW)
S 4	Quelle Sicherheits-Set (für WW Trennkreislauf)	Source safety set (for WW deviding circle)
S 5	Set passive Kühlung	Set passive cooling
S 6	Sicherheitsbaugruppe	Safety assembly
S 7	Quelle Sicherheits-Set (Wasserkreislauf)	Source safety set (for water circle)
ні	Sicherheits-Set aktive Kühlung	Safety set active cooling
H2	Mischer für Heiz- u. Kühlkreislauf	Mixer for heating and cooling circle
H3	Sicherheitsbaugruppe Heizung (optional)	Safety assembly heating (optional)
H4	3-Wegeventil für Kompaktspeicher	3-way valve for compact tank
H5	Motorventil für Kombispeicher aktive Kühlung	Motor valve for combi tank active cooling
H6	Strömungswächter für aktive Kühlung	Flow sensor for active cooling
H7	Ladepumpen Set BW	Charge pump set BW
H8	Heizungsanschlussschläuche + Sole	Pipes for heating connection +brine
H9	Heizstab, elektrisch	Heating coil, electrical
HI0	Pumpenbaugruppe	Pump assembly
нп	Wärmemengenzähler	Heating meter
HI2	Anschluss-Set Heizung Edelstahlwellrohr	Connection kit heating stainless steel tube
HI3	Sicherheitskreis Heizung	Safety circuit heating
HI4	Ladepumpen Set WW	Charge pump set BW

1. M	3-Wege-Ventil, motorgesteuert 3-way-valve, motor controlled	22.	<u></u>	2-Wege-Ventil 2-way valve
2.	Abscheider, allgemein separator, general	23.		Kompensator compensator
3.	Ventil, geschlossen valve, closed	24.		Hydraulische Weiche hydraulic shunt
4.	Ventil, geöffnet valve, open	25.	Ž	Sicherheitsventil, federbelastet safety valve, spring loaded
5. M	3-Wege-Mischer 3-way mixer	26.	ww z kw	Speicher tank
6.	Eckventil, federbelastet valve, spring loaded			
7.	Heizstab, elektrisch heating, electrical	27.	$ \begin{array}{c} $	Temperatur, Anzeigen bzw. Überwachung temperature, indicator and controlling
8.	Verdichter compressor	28.		Wärmeverbraucher heat consumer
9.	Flüssigkeitsfilter, allgemein liquid filter, general	29.	E	Durchflußregulierung flowrate regulation
10. 🔯	Kugelhahn ball valve	30.		Multifunktionshahn/Spülhahn multifunction valve/ rinsing valve
11.	Rippenrohr-Wärmeübertrager, luftgekühlt finned tube heat exchanger, air cooled	31.		Plattenwärmeübertrager plate heat exchangers
12.	Ausdehnungsgefäß expansion vessel	32.		Auffangbehälter collecting vessel
13. FS	Strömungswächter flow switch	33.		Soleverteiler brine circuit mainfold
14. (PI	Druckanzeiger pressure indicator	34.	FI	Durchflussanzeiger flow indicator
15. (PSH)	Druckwächter (steigender Druck) pressure switch (increasing pressure)	35.	PS	Druckschalter pressure switch
16. (PSL)	Druckwächter (fallender Druck) pressure switch (falling pressure)	36.	$\overline{\downarrow}$	Absperrhahn stop cock
17.	Pufferspeicher buffer tank	37.		Solar System solar system
18.	Pumpe, allgemein pump, general	38.	_/	Mikroblasenabscheider
19. 🏟	Be- und Entlüftung, Rohrleitung exhausting valve	39.	10001	microbubble separator Wärmemengenzähler
20.	Rückschlagklappe, Rohrleitung non-return valve	40.	\(\frac{\chi}{2}\)	heat meter Auslass, zur Atmosphäre
21.	Rückschlagventil, Kälteleitung non-return valve, cooling circuit	41.	<u> </u>	outlet, to the atmosphere Flussrichtung flow direction

14 Appendix

- EU declaration of conformity
- Technical data
- Terminal assignment plan

EU Konformitätserklärung/ EU Declaration of conformity

Der Unterzeichner/ The signatory: SmartHeat Deutschland GmbH

Am Augraben 10 D 18273 Güstrow



bestätigt hiermit, dass die nachfolgenden Geräte in der von uns in Verkehr gebrachten Ausführungen die Bestimmungen folgender Richtlinien und Verordnungen erfüllen. Bei einer nicht mit uns abgestimmten Änderung des Gerätes verliert diese Erklärung ihre Gültigkeit certifies that the following indicated devices introduced into the market by us fulfill the requirements of following guidelines and regulations. Any modification to devices that have not been approved by us effectively voids this statement.

Bezeichnung der Wärmepumpe/ description of the heat pump

Typen/ types:

classic 008 BWi (R), classic 010 WWi (R), classic 012 BWi (R), classic 016 WWi (R), classic 024 BWI (R), classic 032 WWi (R)

classic power 012 BWi (R), classic power 016 WWi (R), classic power 024 BWi (R), classic power 032 WWi (R)

Richtlinien/ directives

2014/68/EU Druckgeräterichtlinie/ pressure equipment directive 2014/35/EU Niederspannungsrichtlinie/ Low voltage directive

2014/30/EU EMV- Richtlinie/ EMV-directives

201 I/65/EU RoHS II

2009/125/EG Ökodesign- Richtlinie/ ecodesign directive

Verordnungen/regulations

811/2013 EU- Verordnung "Energiekennzeichnung" 813/2013 EU- Verordnung "Ökodesign"

Angewandte Normen/ applied standards

EN 60335-1:2020-08 DIN 8901:2002-12 EN 378-1:2021-06 EN 60335-2-40:2014-01 EN 378-2:2018-04 EN 60529:2014-09 EN 378-3:2020-12 EN 60730-1:2017-05 EN 378-4:2019-12 EN 61000-3-3:2020-07 EN 12263:1999-01 EN 61000-3-11:2021-03 EN 14511-1:2019-07 EN 61000-3-12:2012-06 EN 14825:2019-07 EN 62233:2008-11 EN 12102-1:2018-02 EN 62233 Ber. I:2009-04 EN 50090-6-1:2018-04 EN ISO 12100:2011-03 EN 55014-1:2018-08 EN ISO 13857:2020-04 EN 55014-2:2016-01 EN ISO 13854:2020-01 EN 60204-1:2019-06 BGR 500 Kapitel 2.35

Güstrow, 01.06.2021

Dokumentenbevollmächtigter

Pascal Retzlaff